

suprema BioEntry W2

Outdoor Vandal-proof Fingerprint Terminal



| BioEntry W2 |

Suprema BioEntry W2 is an outdoor vandal-proof fingerprint IP access terminal featuring Suprema's world best biometric technology and security solution. BioEntry W2 provides class-leading performance and security by featuring Suprema's latest fingerprint algorithm coupled by powerful quad-core CPU and next generation Live Finger Detection technology. Packed in a rugged IP67/IK08 housing with sleek finish, BioEntry W2 is a perfect solution for any indoor or outdoor environment.



suprema BioEntry W2

Outdoor Vandal-proof Fingerprint Terminal



Features



Best-in-class Performance

- Latest Suprema algorithm
- 1.2GHz quad-core CPU



Improved Accuracy & Security

- New advanced Live Finger Detection(LFD) technique
- Improved OP5 optical sensor and algorithm



Expanded Capacity

- Max. 500k users/1 million text logs
- Large memory: 2GB Flash + 256 MB RAM



Best-in-class Features

- PoE support
- IK08 impact protection
- IP67 ingress protection



Versatile Interfaces/RF options

- Wiegand, RS485, TTL I/O, relay
- 125KHz EM/HID Prox
- 13.56 MHz MiFare/DESFire(EV1)/Felica/NFC/iClass


Specifications

IP67 IK08


Biometric	Fingerprint
Template	SUPREMA / ISO 19794-2 / ANSI 378
Extractor / Matcher	MINEX certified and compliant
LFD	Supported
RF Option	125KHz EM/125KHz HID Prox 13.56MHz Mifare/DESFire/DESFire EV1/Felica/NFC 13.56MHz HID iClass
CPU	1.2 GHz Quad Core
Memory	2GB Flash + 256 MB RAM
Max. User	500,000 (1:1), 100,000(1:N)
Max. Template	1,000,000(1:1), 200,000(1:N)
Max. Logs	1,000,000(text)
LED	Multi-Color
Sound	Multi-tone Buzzer
Ethernet	10/100 Mbps, auto MDI/MDI-X
RS-485	1ch host or slave (selectable)
Wiegand	1ch input or output (selectable)
TTL	2ch input
Relay	1
PoE	Supported (IEEE 802.3af compliant)
Ingress Protection	IP67
Impact Protection	IK08
Tamper	Supported
Power	DC 12V
Operating Temperature	-20°C ~ 50°C
Operating Humidity	0% ~ 80%, non-condensing
Dimensions (WxHxD, mm)	50 x 172x 43.5
Unit Weight	251g (294g incl. bracket, washers, bolts)
Certificates	CE, FCC, KC, RoHS, REACH, WEEE, IP67, IK08

System Configuration


• Standalone

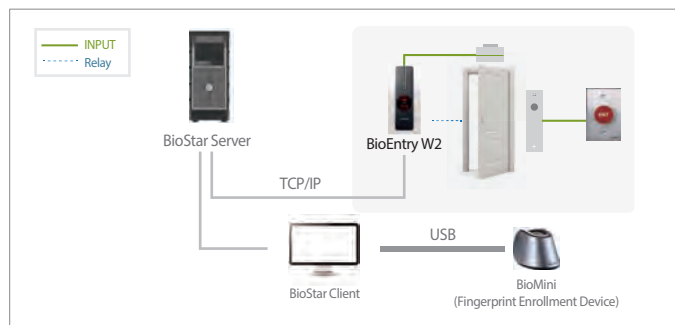

• Standalone-Secure

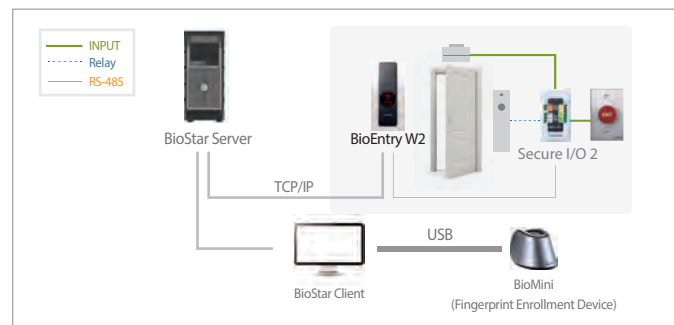

• Distributed Access Control Systems

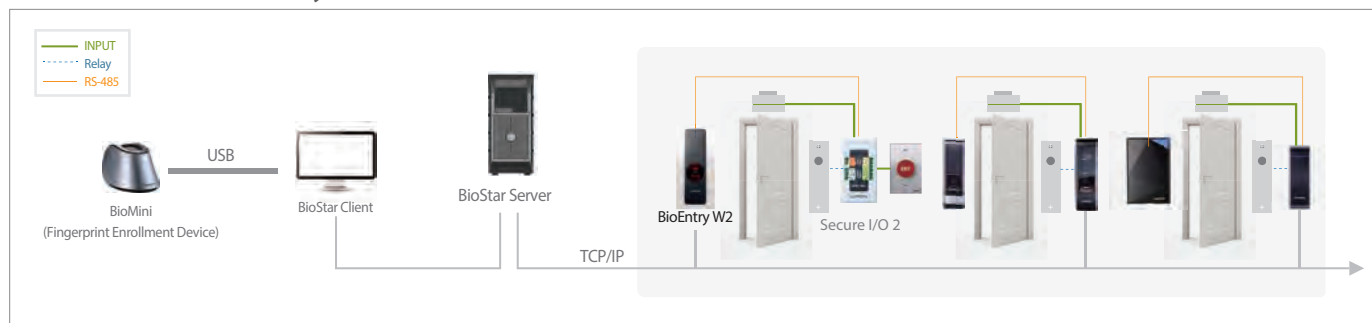

Suprema Inc.

17F Parkview Tower, 248, Jeongja 1ro, Bundang-gu, Seongnam-si, Gyeonggi-do, 463-863 Rep. of KOREA

Tel : +82-31-783-4502 Fax : +82-31-783-4503

E-mail : sales@supremainc.com

